



Since 1987, we construct and we sell quality machines that are now exported in the whole world as a family business in the heart of the Austrian hay region.

Our own research and development have resulted in recent years innovations, which has made us a leader in our product categories.

Together with our partner companies, research centers and partners we manage to bring customer requirements directly into the product line. As a result we can offer technically advanced devices, convincing with a good price performance ratio, reliability and functionality.

We are convinced that genuine innovations and ideas are created where they are needed - in practice. For this reason, we work very closely with our customers.


Our products are manufactured in over 18,000 m² of production and warehouse space. All spare parts from the last 30 years are kept in stock, thus eliminating irritating delays.

LASCO - Technology for Heroes

Johannes Landrichinger

Werner Landrichinger

Herbert Oitner

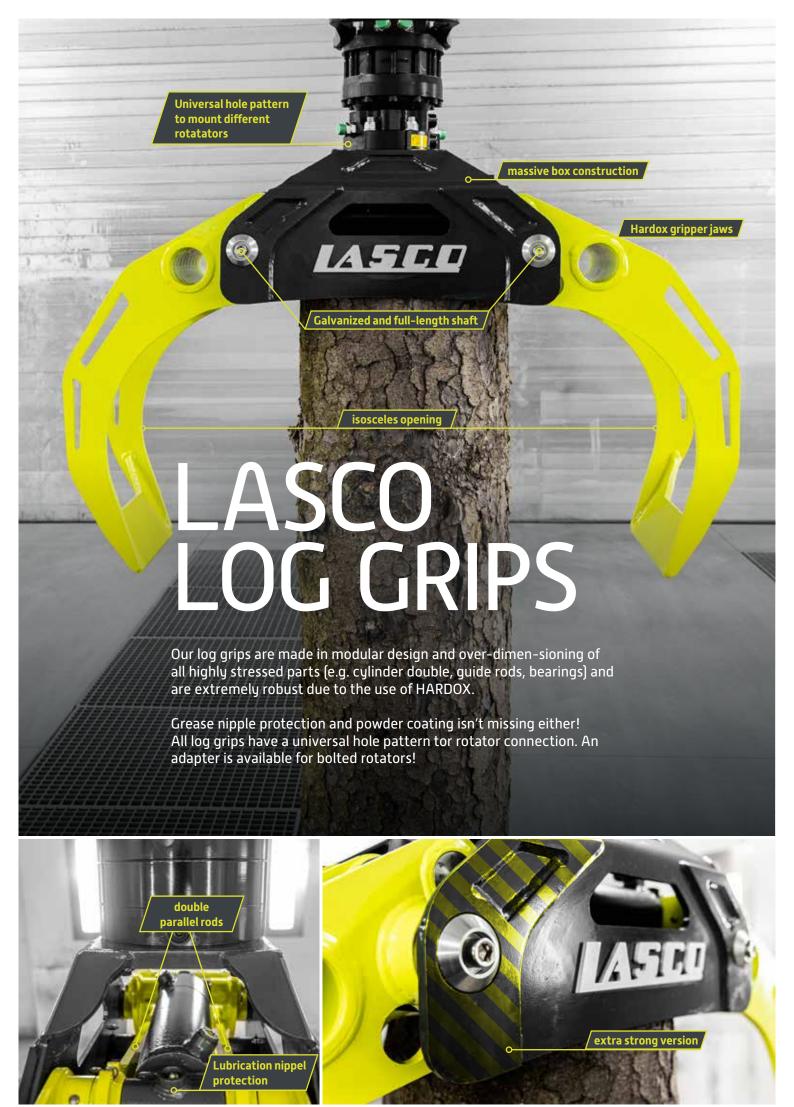

LA800HZ






LA1000HZ










Opening width [mm]	800	1000
Weight [kg]	61	82
Cylinder clamping force [kN] bei 200 bar	5	9,5
Cylinder pushing force [kN] bei 200 bar	39	77

LA1400EZ









LA1700DZ








Opening width [mm]	1400	1700
Weight [kg]	210	219
Cylinder clamping force [kN] bei 200 bar	13,8	16,8
Cylinder pushing force [kN] bei 200 bar	100,5	2x77

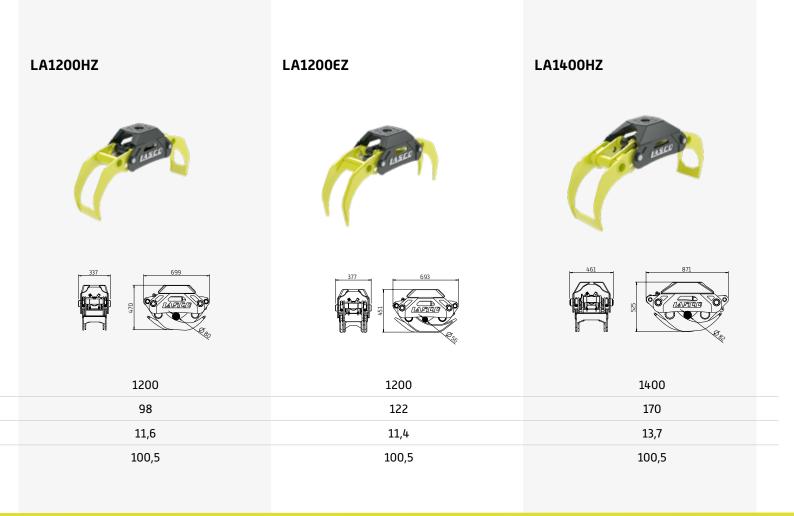



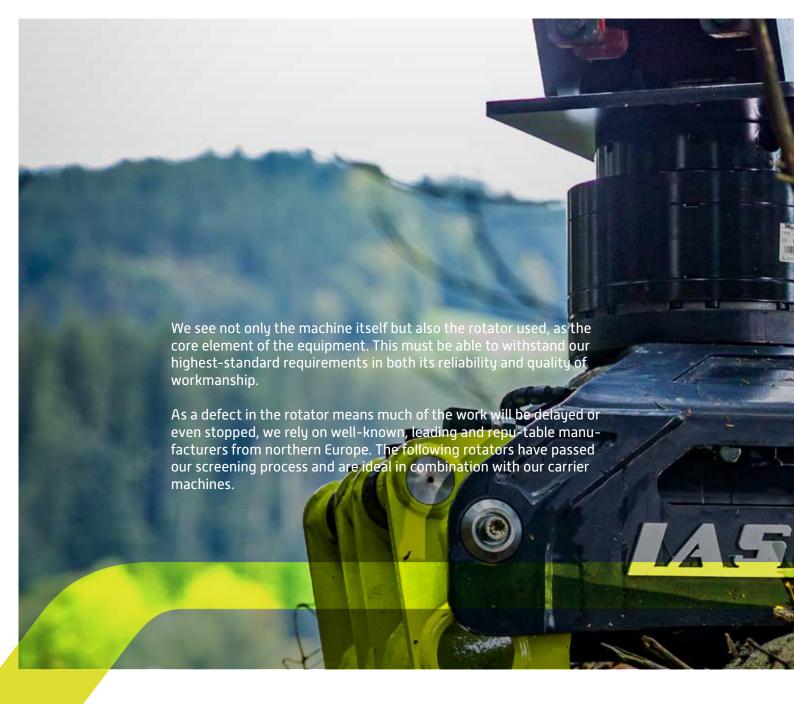









Type	FHR 3.000 SF	FHR 4.500 RF	FHR 5.500 F6	FHR 5.500 RF
Rotation range:	endless	endless	endless	endless
max. axiale load:	3,0 to. / 30 kN	4,5 t. / 45 kN	5,5 t. / 55 kN	5,5 t. / 45 kN
Optimale litre output:	20 l/min	20 l/min	30 l/min	20 l/min
Weight:	25 kg	27kg	36 kg	26 kg
Attachment:	140 x 140 mm Bore 4 x Ø 17 mm	Bolt circle Ø 173 mm Bore 4 x Ø 17 mm	Bolt circle Ø 173mm Bore 6 x Ø 17mm	Bolzen Ø 69 mm (Hülse) Bolzen: Ø 30 mm
max. operating pressure:	250 bar	250 bar	250 bar	250 bar
Torque at 250 bar:	900 Nm	1200 Nm	1300 Nm	1200 Nm











Туре	FHR 10 FD2	FHR 16 FD1	CPR 5	CPR 9
Rotation range:	endless	endless	endless	endless
max. axiale load:	10 t. / 100 kN	16 t. / 160 kN	5 t. / 50 kN	9 t. / 90 kN
Optimale litre output:	30 l/min	40 l/min	30 l/min	30 l/min
Weight:	64 kg	65 kg	45 kg	86 kg
Attachment:	Bolt circle Ø 173 mm Bore 6 x Ø 17 mm	Bolt circle Ø 173 mm Bore 6 x Ø 17 mm	Bolt circle Ø 198 mm Bore 4 x Ø 17 mm	Bolt circle Ø 270 mm Bore 8 x Ø 17 mm
max. operating pressure:	250 bar	250 bar	250 bar	250 bar
Torque at 250 bar:	2800 Nm	3400 Nm	1350 Nm	3000 Nm

